


# Technical Data

## RevPi Con CAN

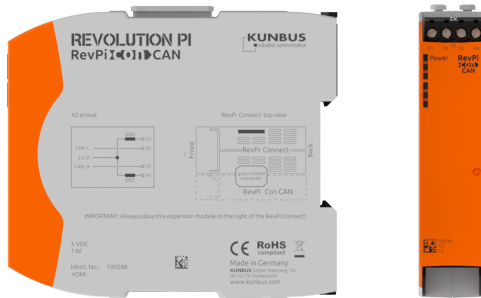

Item No.: 100286

Housing dimensions (H × W × D)	96 × 22.5 × 110.5 mm
Housing type	DIN rail housing (for DIN rail version EN 50022)
Housing material	Polycarbonate
Weight	Approx. 115 g
IP Code	IP20
Power supply	Power supply via ConBridge
Operating temperature	-20 ... +60 °C
Storage temperature	-40 ... +70 °C
Max. relative humidity (at 40 °C)	93 % (non-condensing)
Connectors	4-pole screw terminal
Optical indicator	1 status LED (green)
CAN Controller	Holt HI-3110
Baud rate	Up to 1 Mbit/sec.
CAN Version	CAN 2.0B
Software interface	Accessible via SocketCAN of the Linux operating system
Terminating resistor	Switchable integrated terminating resistor
Connection compatibility	Exclusively connectable via ConBridge of RevPi Connect
Conformity	CE, RoHS
ESD test	Passed (according to EN 61000-4-2)

# REVOLUTION PI

## KUNBUS GmbH

Magirusstr. 7

73760 Ostfildern

Germany

+49 (0)711 400 91 500

Website: <https://www.revolutionpi.com>

E-mail: [info@kunbus.com](mailto:info@kunbus.com)

Changes and errors excepted.