


Technical Data

RevPi Core S

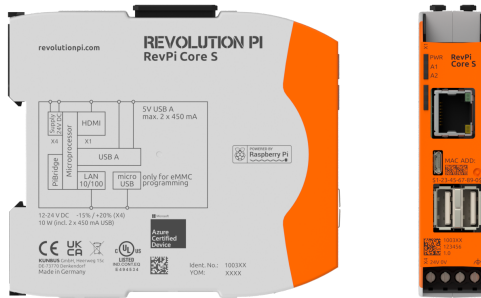

Housing dimensions (H × W × D)	96 × 22.5 × 110.5 mm
Housing type	DIN rail housing for TH35 mounting rail according to DIN EN 60715
Housing material	Polycarbonate
Weight	approx. 115 g
Protection class	IP20 / NEMA Class 1
Power supply	Typ. 24 V DC (10.8 ... 28.8 V DC)
Maximum power consumption	10 W (incl. 900 mA total USB load) ^[1]
Approved operating temperature	-25 ... +55 °C
Approved storage temperature	-40 ... +85 °C
Max. relative humidity (at 40 °C)	up to 93 % (non-condensing)
Interfaces	• 2 × USB A (total current draw from both sockets together max. 900 mA)^[2] • 1 × RJ45 10/100 Ethernet • 1 × Micro-USB (solely for image transfer to eMMC) • 1 × Micro-HDMI 2.0a (4K) • 2 × PiBridge system bus
Connectors	1 × 4-pole screw-type terminal for power supply
Compute Module	Raspberry Pi Compute Module 4S
Processor	Broadcom BCM2711, quad-core Arm Cortex-A72
Clock rate	1.5 GHz
Processor cooling	Passive with heat sink
RAM	1 GB LPDDR4 NOTE: The Linux GUI should only be used on RevPi devices with at least 2 GB RAM.

REVOLUTION PI

Flash memory	8 GB (Item No.: 100359) / 16 GB (Item No.: 100360) / 32 GB (Item No.: 100361)
Compatible RevPi modules	All RevPi I/O modules and RevPi gateway modules can be connected via the PiBridge system bus.
ESD protection	4 kV / 8 kV (according to EN 61131-2 and IEC 61000-6-2)
EMI tests	Passed (according to EN 61131-2 and IEC 61000-6-2)
Surge/Burst tests	Passed (according to EN 61131-2 and IEC 61000-6-2)
Buffer time RTC	min. 24 h
Optical display	3 status LEDs (bi-color), two of them freely programmable
Conformity	CE, RoHS, REACH, UKCA
UL certification	UL-File-No. E494534 NOTE: The device may only be supplied from circuits that comply with Class 2 or Safety Extra Low Voltage (SELV) according to Class 9.4 of UL 61010-1.

Variants

Item No.	RAM	eMMC	Compatible with RevPi Gateways
100359	1 GB	8 GB	✓
100360	1 GB	16 GB	✓
100361	1 GB	32 GB	✓



<https://revolutionpi.com/shop/en/revpi-core-s>

KUNBUS GmbH

Magirusstr. 7
73760 Ostfildern
Germany
+49 (0)711 400 91 500

Website: revolutionpi.com

E-mail: info@kunbus.com

Errors and omissions excepted.

[1] The average power consumption without USB load varies greatly and depends on the use of the interfaces, the GPU and the CPU. It is usually well below 4 W without HDMI.

[2] 900 mA USB output current (sum of both USB outputs) is only available with input voltages >11 V. The bridging time of voltage dips of at least 10 ms required by EN 61131-2 is only guaranteed with a supply voltage of 20.4 ... 28.8 V. At 12 V input voltage this time decreases drastically, especially when driving loads by USB ports.